




## 166 rear side door water guard protection - r r or arrange with door panel removed 7010A04

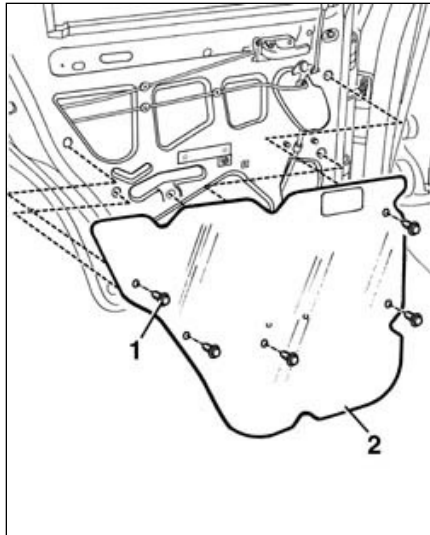

[back to rear side door descending window glass - r r with door panel \(and mount frame\) removed](#)

---



 Removing ( [Refitting](#)  )

1. Remove the door panel retaining bushes.
2. Take off the adhesive water guard.

 Refitting ( [Removing](#)  )

Remove the protective film from the upper part of the water guard.

Position the water guard using the panel retaining holes as a reference. Bond the sealant strip at the upper and lower corners of the door.

Press the sealant strip evenly around the outside of the guard.

Do up the studs fastening the guard to the door.